

An Overview of Manet Power Management Approaches

S. Hemalatha¹, Harikumar Pallathadka², Rajesh Chinhewadi³

^{1,2,3}Manipur International University, Imphal, Manipur, India

Article Info

Article history:

Received November 21, 2023

Revised November 28, 2023

Accepted December 09, 2023

Keywords:

MANET

Energy Utilization

Energy Consumption

Power Management

Performance

ABSTRACT

One of the primary issues with MANET is power optimization and utilization because it relies on the node's internal battery power to operate the wireless network. The performance of the MANET is also affected by one of the parameters of energy consumption and utilization. Each operation in the MANET requires some amount of energy to complete. This article elaborated on MANET power management from its inception to the present, as well as doing comparison research to recommend new methods for improving MANET power utilization. This study examines MANET power management options in terms of numerous parameter metrics, including Mobility Aware, Clustering, Topology, Transmission Range, QOS, and link-based. Finally, the methodologies used in MANET power management and performance factor improvement were summarised. To surpass all performance indicators in MANET utilization, new manipulative tactics are necessary. The innovative method is the most effective.

This is an open access article under the [CC BY-SA](https://creativecommons.org/licenses/by-sa/4.0/) license.



Corresponding Author:

S. Hemalatha

Post Doctoral Research Fellow

Manipur International University

Imphal, Manipur

India

Email: pithemalatha@gmail.com

1. INTRODUCTION

Due to the development of wireless networks in computer networking, the Mobile Adhoc Network has played a vital role in creating communication networks in wireless mediums without any access point. The major challenges of the creation of MANET with respect to the characteristics are transmission range limitation, overhead in the routing process, battery power constraint, asymmetric link, nature of the wireless network, packet loss, mobile nodes route changes, frequent network partitioning, etc.

Among the challenges, battery power management is an important factor in MANET working operations. Enhancing the battery power is done by incorporating the transmission of packets, synchronization signal, beacon signal generation, etc. Several routing protocols have been established to improve battery power consumption in packet transfer. A new hybrid protocol is even being launched to improve battery power consumption. Concentrating only on the routing packet transfer alone is not sufficient to consume the battery power; apart from that, other layers also play a vital role in power optimization. Instant the physical layer beacon signal, MAC layer link establishment, network layer routing, transport layer connection establishment using TCP or UDP protocol, application layer usages, etc.

This article surveys how the different levels contribute to managing the power management in MANET. The article is structured in such a way that section II covers power management in MANET protocol layers, followed by a comparative analysis of power management techniques in MANET in section III, section IV summarises all the methodologies used in MANET for power management, and section V concludes with the new technique.

2. POWER MANAGEMENT IN MANET PROTOCOL LAYERS

2.1. Power Management at the Physical Layer

MANET physical layer power management depends on catering to the aspects of physical layer modulation, noise, power gained in antennae, coding techniques, and interference. The physical layer consists of PHY components and Antenna Components. The Models of signal transmission, reflection, and reception, MAC scheme, channel distortions, Physical parameters, and neighbor node interference are PHY components. The antenna functions and properties are the antenna components used for capturing signals when the antenna is in transmit mode. The total energy used for antenna signal functioning compromised the antenna power transmission, Antenna power receiving, and power required in idle and sleep mode, which is estimated by the equation of 1 to 4.

$$\text{Antenna Transmission Power} = \text{Power Required to Transmit Signals} * \text{Vol} * \text{Time} \quad (1)$$

$$\text{Antenna Receiving Power} = \text{Power Required to Receive The Signals} * \text{Vole} * \text{Time} \quad (2)$$

$$\text{Antenna Idle Power} = \text{Power Required to Idle Mode} * \text{Vol} * \text{Time} \quad (3)$$

$$\text{Antenna Sleep Power} = \text{Current Required to Sleep} * \text{Vole} * \text{Time} \quad (4)$$

2.2. MAC layer Power Management

MANET, MAC layer power management evaluates the routing indicators quantitatively, like energy consumption, packet delivery ratio (PDR), average delay, average jitter, and network delay. Energy consumption is estimated in the metric of joule, packet loss in the first node or middle node, and even the lost node is also the same energy consumed. The average packet delivery rate is the rate of data being received from the sender. Average Packet Delivery rate P_{Avg} , using Equations 5 and 6.

$$PAvg = \frac{(NTrp * 100 + (n! / (n-r)!)) (NTrp * 100 + (n! / (n-r)!))}{(\lim r \rightarrow \infty NSp)} \quad (5)$$

$$PAvg = \frac{(NTrp * 100 + (n! / (n-r)!))}{(\lim r \rightarrow \infty NSp)} \quad (6)$$

Where $NTrp$ – Number of Packets received totally

NSp – Total number of Packet sent

The Average End-to-end delay is also an important parameter in MAC layer power management, which is computed from equation 7.

$$\text{Delay Avg} = \frac{\sum (Tr - Ts)}{\lim r \rightarrow \infty NRP} \quad (7)$$

Where NRP total number of received Packet from all the nodes

Tr – Movement of Packet received

Ts – Packet Send

The Average Jitter is the variation in delay in each Packet computed from Equation 8, which uses many data packets to play a role.

$$JA = \frac{[\sum (Tr - DAvG - Ts) 2]}{\lim r \rightarrow \infty NRP} \quad (8)$$

The throughput of the network is the ratio between the total amount of data passing in a local connection and the time spent transferring the data, as shown in Equation 9.

$$Ta = \frac{(\lim r \rightarrow \infty NRP)}{T tra} \quad (9)$$

2.3. Network Layer Power Management

Node Power

Every node's residual power is necessary to transmit the Packet; when the power gets drained, it leads to packet transmission failure disconnection in the route path. The minimum power for transmitting the Packet and minimum power for receiving the Packet of every node is to be estimated using the formula 10.

$$Mn = \sum_{fn=1}^M \quad Max * \frac{MMin}{Mg} \quad (10)$$

Where f – total number of n nodes

$MMax$ maximum receiving power

$MMin$ Minimum receiving power

Mg Received power of nth node

Link connectivity

Link connectivity is the bidirectional connection between the pair of nodes, which is estimated as follows in Equation 11.

$$Kn = \frac{1}{f} \sum_{fn=1}^f \frac{Kg}{t} \quad (11)$$

Where is t total connectivity

Kg represents the connectivity of the g th node.

Lifetime of the link

The lifetime of every link is needed to connect two nodes and send packets. The link is used for transmitting packets. Due to dynamic topology changes, the link may get disconnected in MANET, so the lifetime of the link is estimated in advance before choosing the route. That could be estimated using the energy model Equation 12.

$$Nn = \frac{1}{f} \sum_{g=1}^f Eg \quad (12)$$

Where, Eg Energy dissipation of gth node

Node Mobility

The mobility of the node, which is computed using Equation 13, is an important factor in MANET.

$$Nm = \frac{1}{|ph|} \sum_{g=ph} Bg \quad (13)$$

|ph| – Set of neighbor nodes

Bg relative mobility

Node Distance

Distance between the nodes is used to estimate the link stability, which is evaluated using the formula of Equation 14.

$$Rn = \sum_{g=1} (Ug, Ph) \quad (14)$$

Ph – Set of neighbor nodes

Ug Energy of the current node

2.4. Transport Layer Power Management

Reliable packet transmission is done in TCP protocol in the MANET transport layer. So, Transport layers support the responsibility of packet delivery by giving [92] ACK signal to the sender so that the retransmission of the Packet will not be initiated.

Old ACK and New ACK times were used in the TCP protocol to inform the source about the Packet received. The received packet rate of the destination is used in the formula in Equation 15.

$$RPR = \frac{Dnap - Doap}{Tnak - Toack} \quad (15)$$

Where Doap – Number packets received at Toack,

Dnap – Number of packets received at Tnak.

Toack – Old ACK time,

Tnak – New ACK time

3. POWER MANAGEMENT COMPARATIVE ANALYSIS

This chapter has done a thorough comparative analysis of the MANET power management protocol through the introduction of many classifications, which are illustrated in tables 1 to 6, with the methodology employed and the benefits and drawbacks of each method. Table 3 discusses the different methodologies used for optimizing the node energy like LEA-AODV, RREQ modification, Route energy index, and Network lifetime, where some methods achieve the energy consumption, others load balancing, etc.

Table 1. Summary of Mobility Awareness

Authors Reference	Methodologies	Merits	Demerits
[1]	LEA-AODV	Distribute Load Balance s	-
[2]	RREQ modify	Energy Field	-
[3]	Route Energy Comprehensive Index	Energy Consumption	-
[4]	Network Lifetime By Enabling The RREQ	Energy consumed	-
[5]	LBMMRE-AOMDV	Maximum Residual Energy	-

Table 2. Summary of Topology Management

Authors Reference	Methodologies	Merits	Demerits
[6]	Optimized Power Control	Good Performance in Transmission Power, Delay, And Energy Consumption	Failed OPC -CC
[7]	M AODV	Reduced Delay And Overhead	Link Breakage
[8]	Automata-Based Topology	Self-Aware, Self-Adaptive, And Self-Adjust Topology	Routing Topologies
[9]	POR Algorithm	Changing The Network Capacity	Poor Network Performance
[10]	Secure Optimized Link State Routing Protocol	Link and Message Without Depending On The Third Party	Failed To Consider Attack Detection
[11]	TESAODV	Reduced The Network Lifetime	Unable To Maintain Energy Levels
[12]	KF-MAC	QOS Parameters	Maximum Delay

Table 3. Summary of Algorithmic Methods

Authors Reference	Methodologies	Merits	Demerits
[13]	SNDA	Reliable Communication	Severe Security
[14]	Game Theory-Based Model	Node's Energy Level	Propagation Delay High Overhead
[15]	Credit-Based Method	Managing Less Energy Consumption	Generic Network Features
[16]	IDSM	reliable QoS	Not satisfied with the overall performance parameters.
[17]	NCV-AODV	Enhanced Neighbour Credit Cost	Delay Remains Also High.
[18]	Artificial Immune System	Increases The PDR	Package Loss
[19]	Energy-Efficient Method	Reliable Data Transmission	Overhead Is Increased.
[20]	MSD-SNDT	energy consumption is much less	vitality utilization
[21]	Fuzzy-Dependent SN Detection Method	More Active Nodes	Power Consumption Is High
[22]	Game Theory	Nodes Cooperate To Play Repeated Game	System To Costly.
[23]	AODV Using A Wireless Network	-	Overall Efficiency Is Not Satisfied Less Packet Delivery Ratio.

Table 4. Summary of Cluster Head

Authors Reference	Methodologies	Merits	Demerits
[24]	ORS	Better Throughput, Lower Latency, Lower Jitter, PDR	-
[25]	HAMBOCHLD	Energy Waste Reduced	-
[26]	HAODV	PDF, END, Routing overhead	-
[27]	EECAO	-	Lengthy Lifetime
[28]	ACO	Network Lifespan And Residual Energy	Two Cluster Heads
[29]	PDR and NLT metrics	Uniform Distribution Of Energy	-
[30]	C-SEWO	Innovative Design.	-

Table 5. Summary of Mobility Aware in Cluster

Authors Reference	Methodologies	Merits	Demerits
[31]	AGS-ROA.	Reduce Route Failure	-
[32]	EPO-FGA	Mobile Node's Lifetime	-
[33]	HPSO-GA	Node Energy	-
[34]	EEMST	-	Prolong The Lifespan
[35]	MKMPE	-	Packet Loss
[36]	E-CFSA	Effective	-
[37]	E-MAVMMF	Best Performance	-
[38]	EBDC	Reduced Consumption Of Energy.	-

Table 6. Summary of Transmission Range

Authors Reference	Methodologies	Merits	Demerits
[39]	Dynamic & Adjustable	Low-Cost	Each Node Having An Optimal Number Of Close To Three (3) Neighbour
[40]	ATP-AODV	Saved A Large Amount Of Energy	ATP-latency
[41]	Metric Norm During The Routing Process	Balanced The Network's Energy Consumption	Extended The Network's Lifespan
[42]	MTPR and MHR	Reducing Control	
[43]	Neighbour Nodes They Use Hello Messages	Maximization Of Network Throughput	Creates Some Delays
[44]	Energy Efficiency By Optimizing The Transmission Power	Throughput Maximization	-
[45]	Optimal Transmission Radius For Flooding In Large Scale Networks	Average Setting Time	-

4. PERFORMANCE COMPARISON OF MANET EXISTING METHODS

Table 7 summarises several approaches and algorithms in terms of supporting parameters. Some methods support some MANET parameters, while others do not. Figure 1 depicts the comparison of Parameters on different articles, from where power, delay congestion control, Packet overhead, security, antenna, and loadless research work was done. Next, the Packet Delivery Ratio and power of the moderate level of research work were carried out. Finally, many researchers concentrate on researching ways to overcome delay and energy consumption.

Table 7. Summary of Power management method with supporting performance

Authors Reference	METHODS/ ALGORITHM	Parameter							
		LOAD	Antenna	Security	Overhead	PDR	Congestion Control	Energy	Delay
[1]	LEA-AODV	✓			✓		✓	✓	✓
[2]	RREQ modify				✓			✓	✓
[3]	Route Energy Comprehensive Index							✓	
[4]	Network Lifetime By Enabling The RREQ	✓						✓	✓
[5]	LBMMRE-AOMDV			✓					
[6]	Optimized Power Control							✓	
[7]	M AODV							✓	✓
[8]	Automata-Based Topology							✓	✓
[9]	POR Algorithm								✓
[10]	Secure Optimized Link State Routing Protocol	✓						✓	
[11]	TESAODV	✓						✓	✓
[12]	KF-MAC							✓	✓
[13]	SNDA						✓		
[14]	Game Theory-Based Model								
[15]	Credit-Based Method							✓	
[16]	IDSM							✓	
[17]	NCV-AODV							✓	
[18]	Artificial Immune System					✓			
[19]	Energy-Efficient Method					✓			
[20]	MSD-SNDT								
[21]	Fuzzy-Dependent SN Detection Method	✓						✓	✓
[22]	Game Theory								
[23]	AODV Using A Wireless Network							✓	
[24]	ORS							✓	
[25]	HAMBOCHLD	✓							
[26]	HAODV							✓	
[27]	EECAO	✓				✓			
[28]	ACO	✓				✓			
[29]	PDR and NLT metrics	✓				✓			
[30]	C-SEWO					✓			
[31]	AGS-ROA.							✓	
[32]	EPO-FGA							✓	
[33]	HPSO-GA							✓	
[34]	EEMST							✓	✓
[35]	MKMPE							✓	✓
[36]	E-CFSA							✓	✓
[37]	E-MAVMMF							✓	✓
[38]	EBDC							✓	✓
[39]	Dynamic & Adjustable							✓	✓
[40]	ATP-AODV							✓	✓
[41]	Metric Norm During The Routing Process							✓	✓

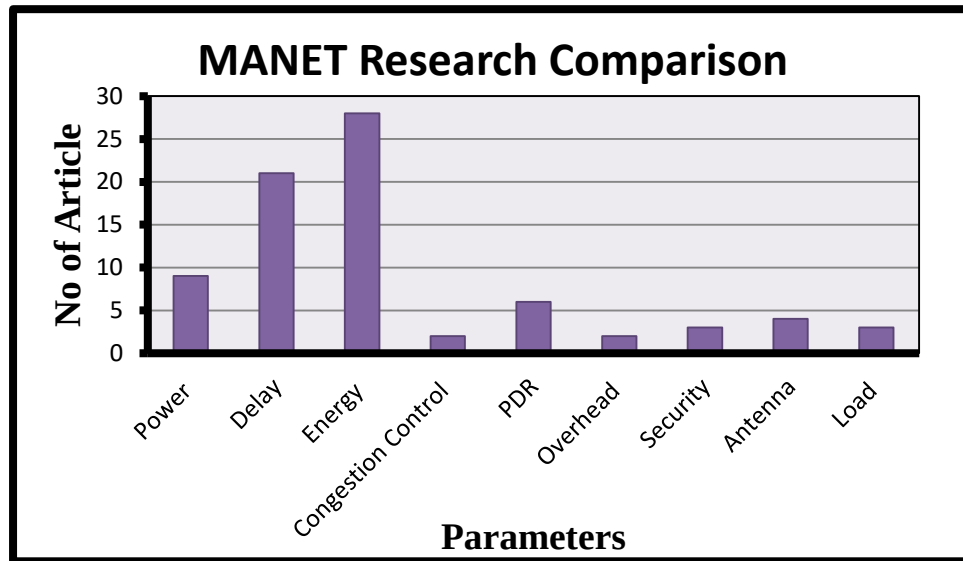


Figure 1. MANET Research Comparison

5. CONCLUSION

This research paper discusses MANET power management approaches with regard to several parameter metrics such as Mobility awareness, Clustering, Topology, Transmission Range, QOS, and link-based. Finally, the approaches employed for power management and performance factor improvement in MANET were summarised. Still, new strategies for manipulating are required to overcome all performance metrics in MANET utilization. Power management in a wireless network is a time-consuming task, especially in a Mobile Adhoc Network, because each node runs on its own power. When the internal battery fails, the entire communication system fails. Several strategies are proposed to increase the performance of the MANET battery management, and this might be used to evaluate the MANET's performance metrics. This paper finds new strategies enhanced in feature work, which could include adding internal node parameter adjustments such as introducing the mute ideal node, beacon signal utilization, and alteration in MANET working principles known as sleep and awake node management in MANET. The forwarding of packets by a single node amid the clustered to enhance battery life is accomplished by the collaborative route management technique.

REFERENCES

- [1] M. AL-Gabri, L. I. Chunlin, Y. Zhiyong, A. H. N. Hasan., and Z. Xiaoqing, "Improved the Energy of Ad Hoc On-Demand Distance Vector Routing Protocol," *IERI Procedia*, vol. 2, pp. 355–361, 2012, doi: 10.1016/j.ieri.2012.06.101.
- [2] D. Yang, H. Xia, E. Xu, D. Jing, and H. Zhang, "Energy-Balanced Routing Algorithm Based on Ant Colony Optimization for Mobile Ad Hoc Networks," *Sensors*, vol. 18, no. 11, p. 3657, Oct. 2018, doi: 10.3390/s18113657.
- [3] C. Gu and Q. Zhu, "An Energy-Aware Routing Protocol for Mobile Ad Hoc Networks Based on Route Energy Comprehensive Index," *Wirel. Pers. Commun.*, vol. 79, no. 2, pp. 1557–1570, Nov. 2014, doi: 10.1007/s11277-014-1946-1.
- [4] L. Li, C. Li, and P. Yuan, "An Energy Level Based Routing Protocol in Ad Hoc Networks," *Wirel. Pers. Commun.*, vol. 81, no. 3, pp. 981–996, Apr. 2015, doi: 10.1007/s11277-014-2166-4.
- [5] S. A. Alghamdi, "Load balancing maximal minimal nodal residual energy ad hoc on-demand multipath distance vector routing protocol (LBMRE-AOMDV)," *Wirel. Networks*, vol. 22, no. 4, pp. 1355–1363, May 2016, doi: 10.1007/s11276-015-1029-6.
- [6] R. Chaudhry and S. Tapaswi, "Optimized power control and efficient energy conservation for topology management of MANET with an adaptive Gabriel graph," *Comput. Electr. Eng.*, vol. 72, pp. 1021–1036, Nov. 2018, doi: 10.1016/j.compeleceng.2018.03.013.
- [7] X. M. Zhang, Y. Zhang, F. Yan, and A. V. Vasilakos, "Interference-Based Topology Control Algorithm for Delay-Constrained Mobile Ad Hoc Networks," *IEEE Trans. Mob. Comput.*, vol. 14, no. 4, pp. 742–754, Apr. 2015, doi: 10.1109/TMC.2014.2331966.
- [8] P. Rahmani, H. H. S. Javadi, H. Bakhshi, and M. Hosseinzadeh, "TCLAB: A New Topology Control Protocol in Cognitive MANETs Based on Learning Automata," *J. Netw. Syst. Manag.*, vol. 26, no. 2, pp. 426–462, Apr. 2018, doi: 10.1007/s10922-017-9422-3.
- [9] T. Santhi Sri, J. Rajendra Prasad, and R. Kiran Kumar, "SEE: Synchronized Efficient Energy Calculation for Topology Maintenance & Power Saving in Ad Hoc Networks," *Arab. J. Sci. Eng.*, vol. 43, no. 8, pp. 4353–

- 4363, Aug. 2018, doi: 10.1007/s13369-017-3043-8.
- [10] T. Singh, J. Singh, and S. Sharma, "Energy efficient secured routing protocol for MANETs," *Wirel. Networks*, vol. 23, no. 4, pp. 1001–1009, May 2017, doi: 10.1007/s11276-015-1176-9.
 - [11] S. Sridhar, R. Baskaran, R. Anitha, and R. Sankar, "Proficient and Secured Routing in MANET Based on Trust and Energy Supported AODV," *Appl. Math. Inf. Sci.*, vol. 11, no. 3, pp. 807–817, May 2017, doi: 10.18576/amis/110321.
 - [12] M. Rao and N. Singh, "Energy Efficient QoS Aware Hierarchical KF-MAC Routing Protocol in Manet," *Wirel. Pers. Commun.*, vol. 101, no. 2, pp. 635–648, Jul. 2018, doi: 10.1007/s11277-018-5708-3.
 - [13] M. MOHAMED MUSTHAFA, K. VANITHA, A. M. J. M. ZUBAIR RAHMAN, and K. ANITHA, "An Efficient Approach to Identify Selfish Node in MANET," in *2020 International Conference on Computer Communication and Informatics (ICCCI)*, IEEE, Jan. 2020, pp. 1–3. doi: 10.1109/ICCCI48352.2020.9104076.
 - [14] A. Vij, V. Sharma, and P. Nand, "Selfish Node Detection using Game Theory in MANET," in *2018 International Conference on Advances in Computing, Communication Control and Networking (ICACCCN)*, IEEE, Oct. 2018, pp. 104–109. doi: 10.1109/ICACCCN.2018.8748632.
 - [15] S. Nobahary and S. Babaie, "A Credit-based Method to Selfish Node Detection in Mobile Ad-hoc Network," *Appl. Comput. Syst.*, vol. 23, no. 2, pp. 118–127, Dec. 2018, doi: 10.2478/acss-2018-0015.
 - [16] N. Veeraiyah and B. T. Krishna, "Selfish node detection IDSM based approach using individual master cluster node," in *2018 2nd International Conference on Inventive Systems and Control (ICISC)*, IEEE, Jan. 2018, pp. 427–431. doi: 10.1109/ICISC.2018.8399109.
 - [17] K. Rama Abirami and M. G. Sumithra, "Evaluation of neighbor credit value based AODV routing algorithms for selfish node behavior detection," *Cluster Comput.*, vol. 22, no. S6, pp. 13307–13316, Nov. 2019, doi: 10.1007/s10586-018-1851-6.
 - [18] L. E. Jim and M. A. Gregory, "Improvised MANET Selfish Node Detection using Artificial Immune System based Decision Tree," in *2019 29th International Telecommunication Networks and Applications Conference (ITNAC)*, IEEE, Nov. 2019, pp. 1–6. doi: 10.1109/ITNAC46935.2019.9077968.
 - [19] M. Fayaz, G. Mehmood, A. Khan, S. Abbas, M. Fayaz, and J. Gwak, "Counteracting Selfish Nodes Using Reputation Based System in Mobile Ad Hoc Networks," *Electronics*, vol. 11, no. 2, p. 185, Jan. 2022, doi: 10.3390/electronics11020185.
 - [20] K. Nirmaladevi and K. Prabha, "A selfish node trust aware with Optimized Clustering for reliable routing protocol in Manet," *Meas. Sensors*, vol. 26, p. 100680, Apr. 2023, doi: 10.1016/j.measen.2023.100680.
 - [21] S. Nobahary, H. G. Garakani, A. Khademzadeh, and A. M. Rahmani, "Selfish node detection based on hierarchical game theory in IoT," *EURASIP J. Wirel. Commun. Netw.*, vol. 2019, no. 1, p. 255, Dec. 2019, doi: 10.1186/s13638-019-1564-4.
 - [22] R. Suresh Kumar, P. Manimegalai, P. T. Vasanth Raj, R. Dhanagopal, and A. Johnson Santhosh, "Cluster Head Selection and Energy Efficient Multicast Routing Protocol-Based Optimal Route Selection for Mobile Ad Hoc Networks," *Wirel. Commun. Mob. Comput.*, vol. 2022, pp. 1–12, Jun. 2022, doi: 10.1155/2022/5318136.
 - [23] V. T and R. Chakravarthi, "An energy efficient algorithm in MANET using Monarch Butterfly Optimization and Cluster Head Load Distribution," in *2022 International Conference on Communication, Computing and Internet of Things (IC3IoT)*, IEEE, Mar. 2022, pp. 1–5. doi: 10.1109/IC3IoT53935.2022.9767917.
 - [24] A. Goyal, V. K. Sharma, S. Kumar, and R. C. Poonia, "Hybrid AODV: An Efficient Routing Protocol for Manet Using MFR and Firefly Optimization Technique," *J. Interconnect. Networks*, vol. 21, no. 01, p. 2150004, Mar. 2021, doi: 10.1142/S0219265921500043.
 - [25] L. Kumar and P. Kumar, "BITA-Based Secure and Energy-Efficient Multi-Hop Routing in IoT-WSN," *Cybern. Syst.*, vol. 54, no. 6, pp. 809–835, Aug. 2023, doi: 10.1080/01969722.2022.2110683.
 - [26] M. K. Sahu and S. Patil, "Enhanced Double Cluster Head Selection using Ant-Colony Optimization for Energy-Efficient Routing in Wireless Sensor Network," *SAMRIDDHI A J. Phys. Sci. Eng. Technol.*, vol. 13, no. 01, pp. 35–41, Jun. 2021, doi: 10.18090/samriddhi.v13i01.7.
 - [27] B. Devika and P. N. Sudha, "Power optimization in MANET using topology management," *Eng. Sci. Technol. an Int. J.*, vol. 23, no. 3, pp. 565–575, Jun. 2020, doi: 10.1016/j.jestch.2019.07.008.
 - [28] M. Braik, A. Hammouri, J. Atwan, M. A. Al-Betar, and M. A. Awadallah, "White Shark Optimizer: A novel bio-inspired meta-heuristic algorithm for global optimization problems," *Knowledge-Based Syst.*, vol. 243, p. 108457, May 2022, doi: 10.1016/j.knosys.2022.108457.
 - [29] and B. S. S. Bhatnagar, Gunjan, Gobi N., Humera Aqeel, "Sparrow-Based Differential Evolutionary Search Algorithm for Mobility Aware Energy Efficient Clustering in MANET Network," *Int. J. Intell. Syst. Appl. Eng.*, vol. 11, 2023, [Online]. Available: <https://ijisae.org/index.php/IJISAE/article/view/3032>
 - [30] K. S. Dr.N. Sivapriya, Dr.R.Mohandas, Mr.P.Kiran kumar, "Optimal Route Selection For Mobile Ad- Hoc Networks Based On Cluster Head Selection And Energy Efficient," *Comput. Integr. Manuf. Syst.*, vol. 28, no. 12, pp. 1059–1065, 2022, [Online]. Available: <http://cims-journal.com/index.php/CN/article/view/496>
 - [31] R. Saravanan, K. Suresh, and S. S. Arumugam, "A modified k-means-based cluster head selection and Philippine eagle optimization-based secure routing for MANET," *J. Supercomput.*, vol. 79, no. 9, pp. 10481–10504, Jun. 2023, doi: 10.1007/s11227-023-05053-1.
 - [32] P. Bisen, D., Mishra, S. and Saurabh, "K-means based cluster formation and head selection through artificial neural network in MANET," 2021, doi: <https://doi.org/10.21203/rs.3.rs-667651/v1>.
 - [33] N. Khatoun and Amritanjali, "Mobility Aware Energy Efficient Clustering for MANET: A Bio-Inspired Approach with Particle Swarm Optimization," *Wirel. Commun. Mob. Comput.*, vol. 2017, pp. 1–12, 2017, doi: 10.1155/2017/1903190.

- [34] D. A. Goldberg, M. I. Reiman, and Q. Wang, "A Survey of Recent Progress in the Asymptotic Analysis of Inventory Systems," *Prod. Oper. Manag.*, vol. 30, no. 6, pp. 1718–1750, Jun. 2021, doi: 10.1111/poms.13339.
- [35] M. Izharul, S. P. Singh, and M. N. Doja, "Adaptive-Transmission-Power Ad Hoc On-Demand Distance Vector Routing Protocol for Mobile Ad hoc Network," *Int. J. Comput. Appl.*, vol. 138, no. 2, pp. 1–10, Mar. 2016, doi: 10.5120/ijca2016908721.
- [36] P. Thiyagarajan and S. SenthilKumar, "Power efficient Memetic Optimized and Adjacent Exponentially Distributed Routing in Mobile Ad Hoc Networks," *Comput. Commun.*, vol. 150, pp. 209–215, Jan. 2020, doi: 10.1016/j.comcom.2019.11.025.
- [37] & F. A. S. Kavitha N, Vinitha G, Preethi R, Lilly Florence, "AD-HOC Better Costing Dynamic Routing Protocol for Enhancement of Network Lifetime," *entral Asian J. Theor. Appl. Sci.*, vol. 3, no. 5, pp. 305–329, 2022, [Online]. Available: <https://doi.org/10.17605/OSF.IO/SK9UY>
- [38] N.-U. Park, J.-C. Nam, and Y.-Z. Cho, "Impact of node speed and transmission range on the hello interval of MANET routing protocols," in *2016 International Conference on Information and Communication Technology Convergence (ICTC)*, IEEE, Oct. 2016, pp. 634–636. doi: 10.1109/ICTC.2016.7763550.
- [39] A. Porto and M. Stojanovic, "Optimizing the Transmission Range in an Underwater Acoustic Network," in *OCEANS 2007*, IEEE, Sep. 2007, pp. 1–5. doi: 10.1109/OCEANS.2007.4449241.
- [40] W. Wang, X. Liu, Y. Yao, Y. Pan, Z. Chi, and T. Zhu, "CRF: Coexistent Routing and Flooding using WiFi Packets in Heterogeneous IoT Networks," in *IEEE INFOCOM 2019 - IEEE Conference on Computer Communications*, IEEE, Apr. 2019, pp. 19–27. doi: 10.1109/INFOCOM.2019.8737525.
- [41] S. Dalal and R. Ruhil, "ROUTING BASE CONGESTION CONTROL METRICS IN MANETS," *Adv. Sci. Technol. Res. J.*, vol. 8, no. 23, pp. 33–40, 2014, doi: 10.12913/22998624.1120320.
- [42] Y. Chen and W. Liu, "MAC Layer Energy Consumption and Routing Protocol Optimization Algorithm for Mobile Ad Hoc Networks," *Complexity*, vol. 2021, pp. 1–12, Feb. 2021, doi: 10.1155/2021/6687189.
- [43] D. Jinfeng, G. Zhongwen, C. Jiabao, and Z. Guangxu, "Optimum Transmission Range for Underwater Acoustic Sensor Networks," in *2008 International Conference on Information Networking*, IEEE, Jan. 2008, pp. 1–4. doi: 10.1109/ICOIN.2008.4472799.
- [44] H. L. Gururaj, R. Natarajan, N. A. Almujaally, F. Flammini, S. Krishna, and S. K. Gupta, "Collaborative Energy-Efficient Routing Protocol for Sustainable Communication in 5G/6G Wireless Sensor Networks," *IEEE Open J. Commun. Soc.*, vol. 4, pp. 2050–2061, 2023, doi: 10.1109/OJCOMS.2023.3312155.
- [45] I. U. Khan and Naga Lakshmi Sowjanya Cherukupalli, "Research on the analytics of traffic pumping in telecommunications via data science using rehabilitated frog leaping algorithm," *Int. J. Data Informatics Intell. Comput.*, vol. 2, no. 1, pp. 51–61, Mar. 2023, doi: 10.59461/ijdiic.v2i1.46.

BIOGRAPHIES OF AUTHORS



S. Hemalatha has completed BE (CSE) and ME (CSE) from Arulmigu Meenakshi Amman college of engineering in the year 2000 and 2004 respectively. Completed PhD from Anna University in the year of 2016. Presently pursuing Post Doctorial Program in Manipur International University under the research area of Mobile Adhoc Security. She has more than 22 years of experience in different engineering colleges. Presently working as, a professor and Head in CSBS department at Panimalar institute of technology. She has more contribution in international and national journal, books and patents. She can be contacted at email: pithemalatha@gmail.com.



Harikumar Pallathadka is a highly accomplished individual in Law and Management, with Post Doctoral Degrees in both fields. With over 300 published research papers in reputable journals, including SCI/Scopus, he showcases his versatility and expertise. He has also published over 300 National and International patents, with around 50 awarded. Prof. Pallathadka is also well known social activist. An experienced administrator and an authority in Constitutional Law and Machine Learning, he currently holds the position of Professor and Vice Chancellor at Manipur International University. His extensive accomplishments and dedication highlight his exceptional abilities. He can be contacted at email: harikumar@miu.edu.in.



Rajesh Chinchewadi has completed BE (Computer Science & Engineering) from University BDT College of Engineering, Davangere, University of Mysore, Of Mysore in the year 1993. Completed EGMP (EMBA) from Indian Institute of Management, Bangalore. He has more than 25 years of experience in different IT Technology MNCs - Hewlett Packard, Cisco, GE GXs, Startups in senior management positions. Presently working as, a professor and Chief Technology Officer & Dean Innovation for Manipur International University, Director, Strategy for Global Investment firm and mentor to startups. He can be contacted at email: rajesh.cto@miu.edu.in.